
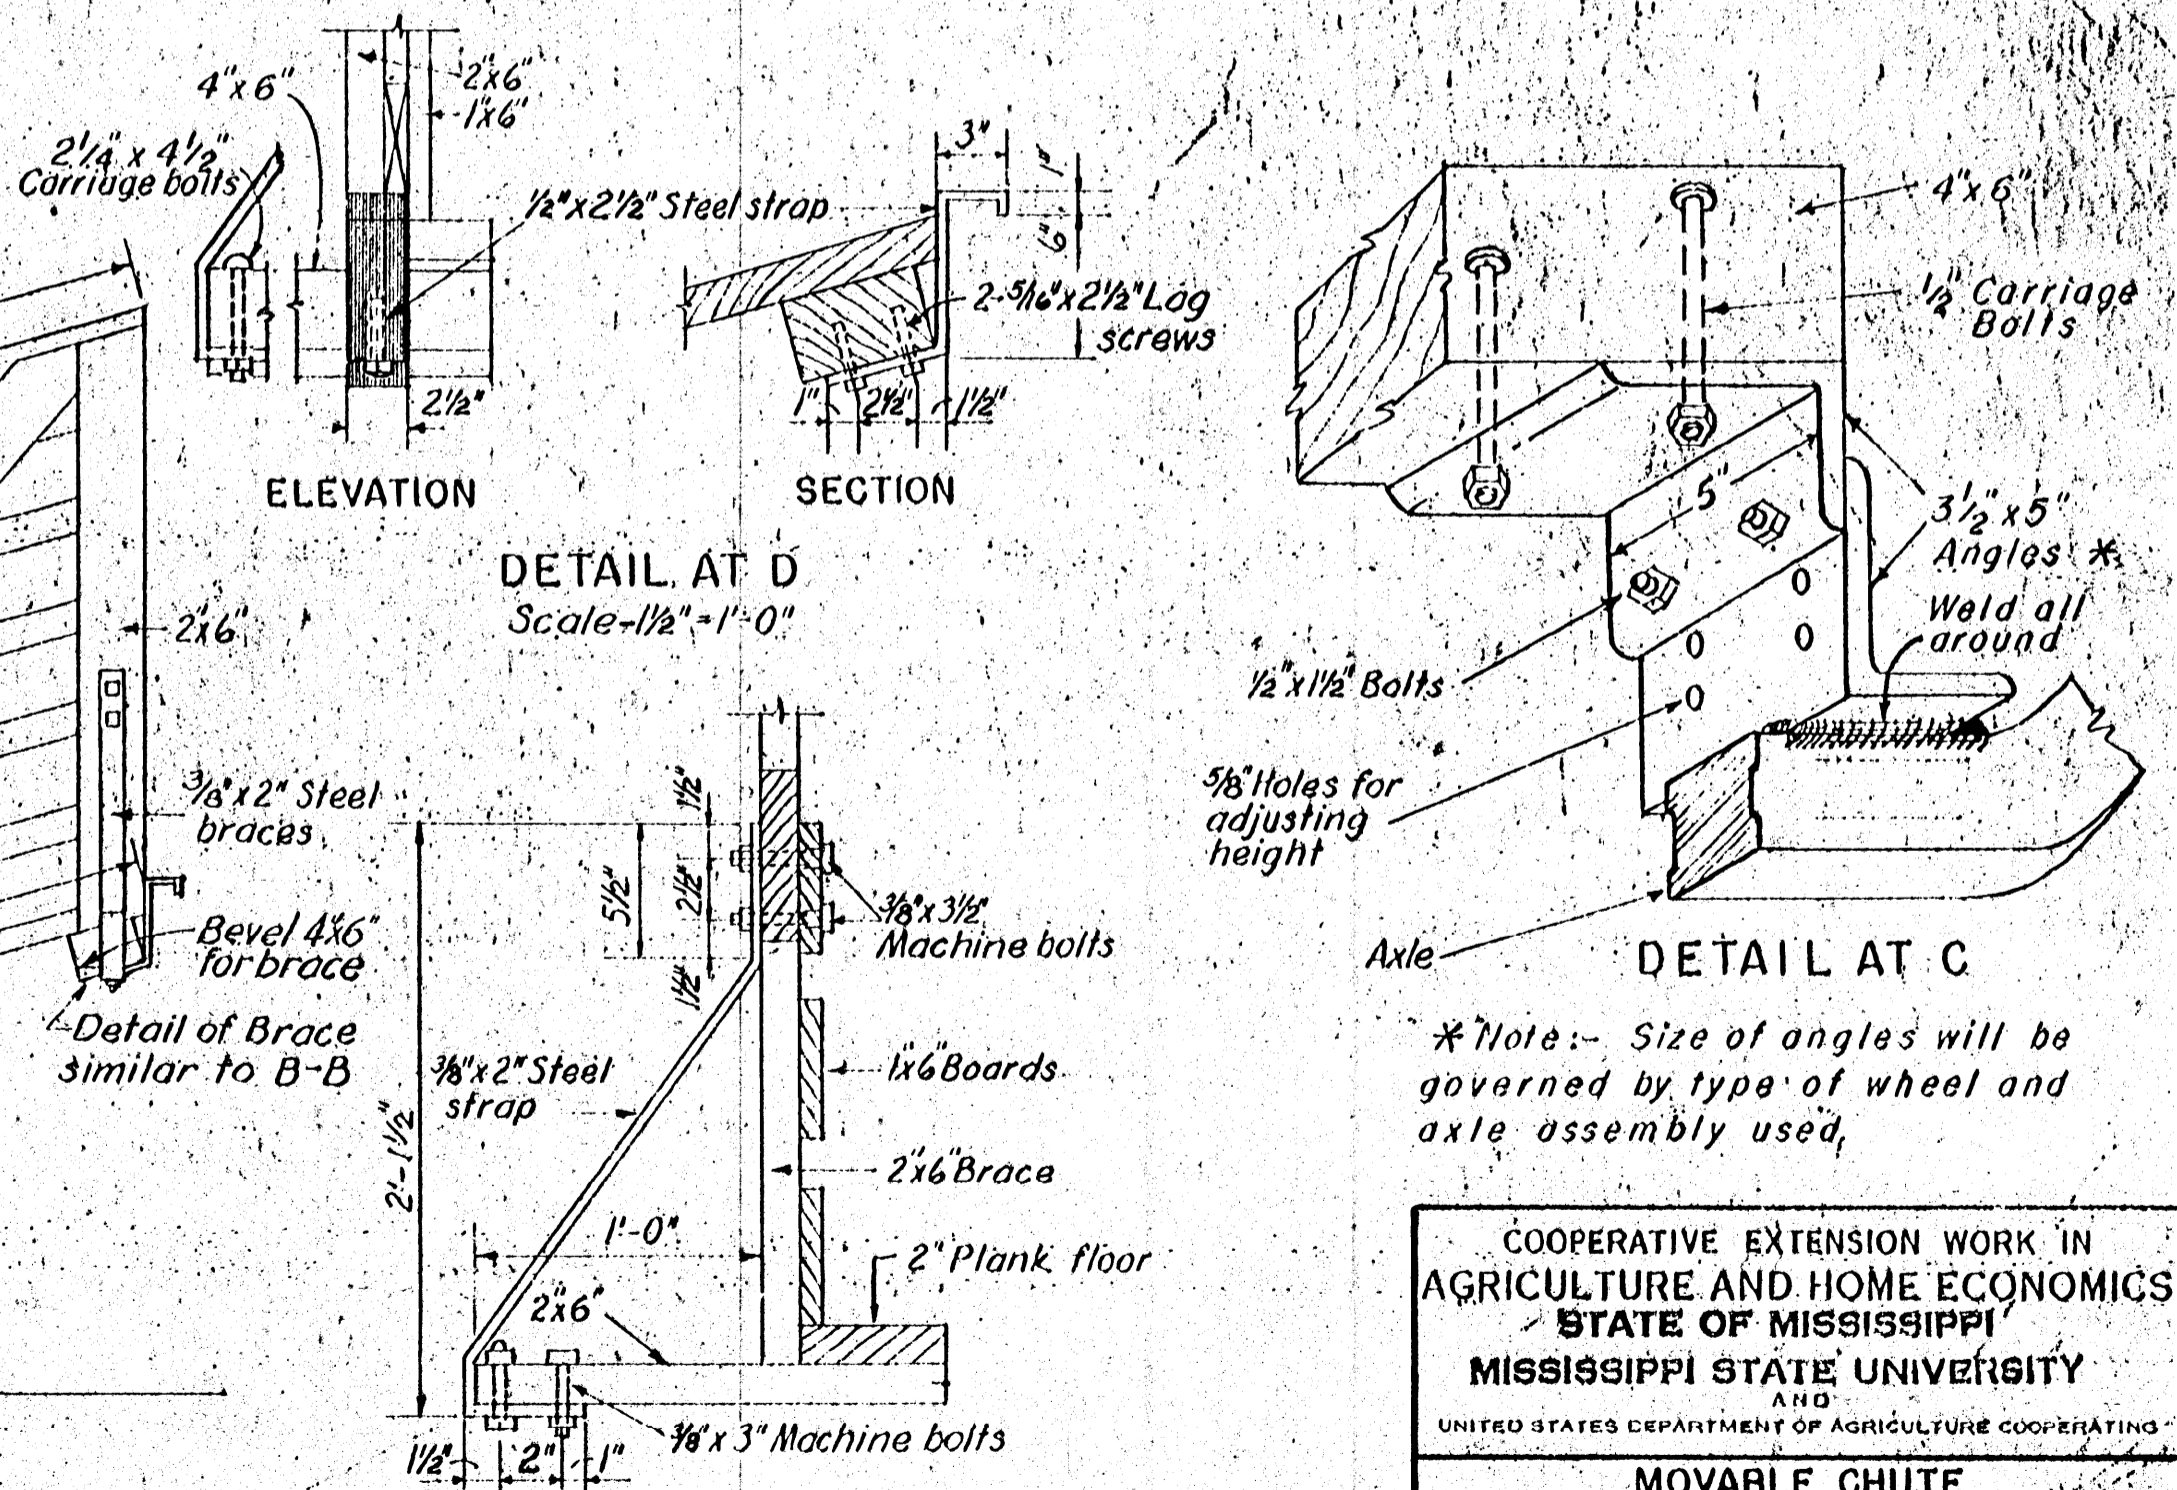


- Lumber**
- 1 x 3 x 8'-0" = 6 pcs.
  - 1 x 6 x 8'-0" = 3 "
  - 1 x 6 x 12'-0" = 12 "
  - 2 x 6 x 10'-0" = 1 "
  - 2 x 6 x 12'-0" = 5 "
  - 2 x 6 x 14'-0" = 2 "
  - 2 x 8 x 12'-0" = 2 "
  - 4 x 6 x 14'-0" = 1 "
- Steel strap** -  $\frac{3}{8}'' \times 2'' \times 2'-10''$  - 4 ea.  
 $\frac{3}{8}'' \times 2'' \times 2'-0''$  - 4 "  
 $\frac{1}{2}'' \times 2\frac{1}{2}'' \times 1'-4''$  - 2 "
- Carriage bolts** -  $\frac{1}{2}'' \times 4\frac{1}{2}''$  - 12 "  
**Machine bolts** -  $\frac{3}{8}'' \times 3\frac{1}{2}''$  - 16 "  
 $\frac{1}{2}'' \times 1\frac{1}{2}''$  - 4 "  
 $\frac{3}{8}'' \times 3''$  - 8 "  
**Lag screws** -  $\frac{5}{16}'' \times 2\frac{1}{8}''$  - 4 "  
**Nails** - 6d - 2 1/2 lbs.  
 10d - 2 1/2 "
- Wheel and axle assembly** - 1 ea.  
 \* **Steel angle** -  $3\frac{1}{2}'' \times 5'' \times 5''$  - 4 ea

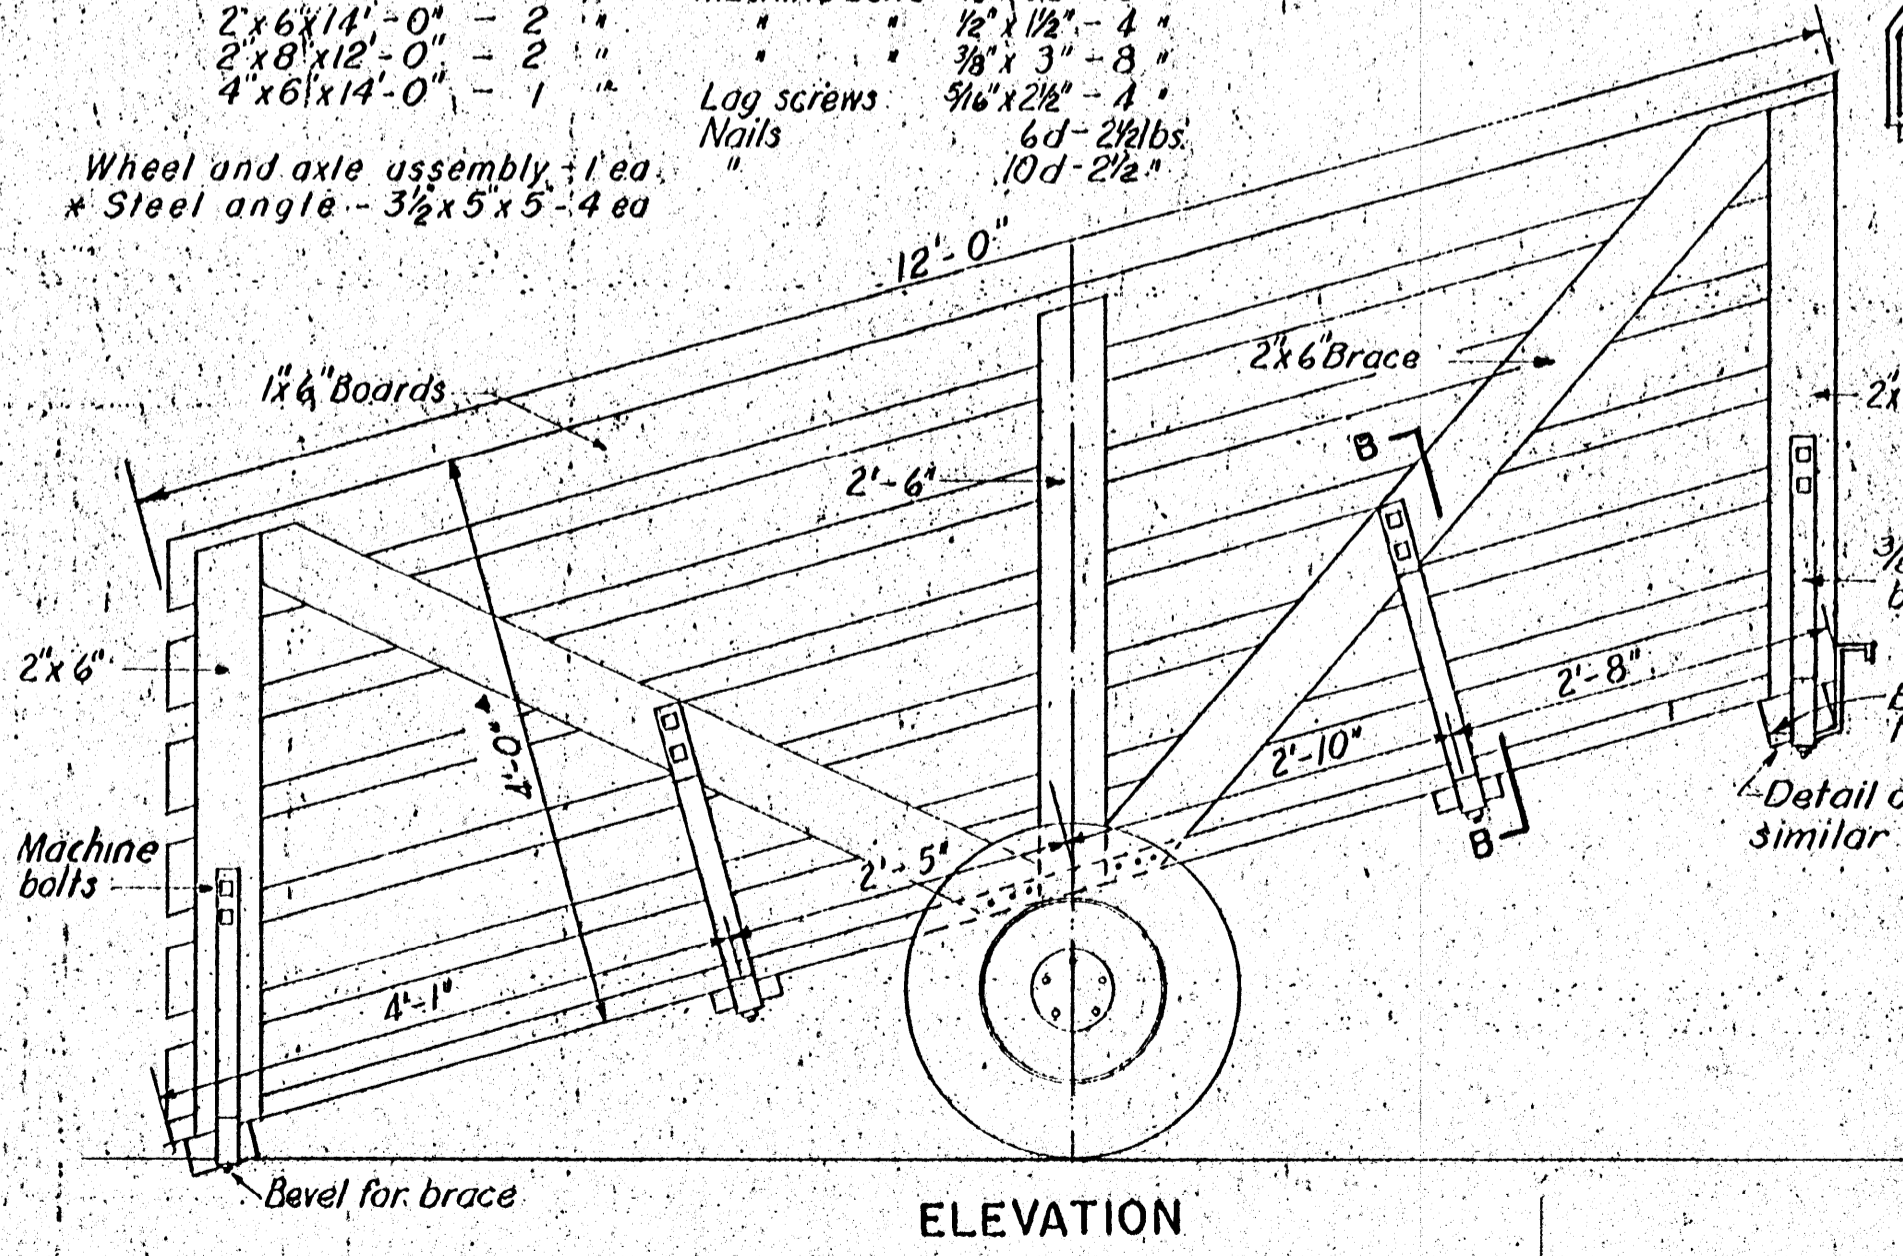

▲ NOTE: Increase to 5'-0" for range cattle.

COOPERATIVE EXTENSION WORK IN  
 AGRICULTURE AND HOME ECONOMICS  
 STATE OF MISSISSIPPI  
 MISSISSIPPI STATE UNIVERSITY  
 AND  
 UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING

**MOVABLE CHUTE FOR LOADING CATTLE.**

USDA '48 EX. 5681 SHEET 1 OF 1

Revised 1955